EDEN

GLAZED PORCELAIN & CERAMIC | FLOOR & WALL TILES

MARBLE SELECT















EDEN



6 SIZES 4 COLOURS 4 3 FINISHES

Taking inspiration from the Serenity trend, Eden features marble mineral vein detailing for calm, refreshingly serene spaces. The colour palette is comprised of sophisticated neutral tones for true versatility, creating modern sleek interiors or warm, cosy settings. Unusual tactile textures are explored with varied linear patterning, raised geometric structures and edge detail with the selection of glossy decorative field tiles adding luxury to commercial interiors.












04

Size Formats Sizing & Packing Information

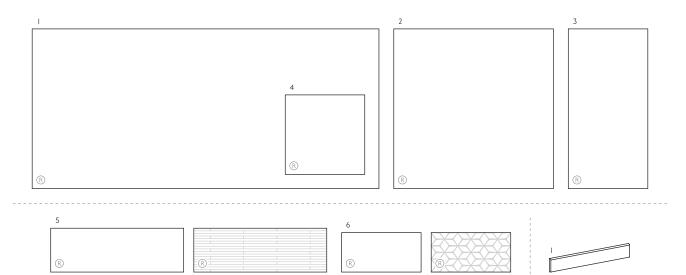

Note: Product sizes 5 to 8 are Wall Tiles Only (BIII)

| # | Size | Thickness | Finish | Structure | Colour Availability | Pcs / Box | M2 / Box | Kg / Box |
|---|---------------------------------|---------------|------------|-----------|---------------------------------------|-----------|----------------------|----------|
| # | 3126 | THICKHESS | | Structure | · · · · · · · · · · · · · · · · · · · | | | |
| 1 | I 2600xI200mm | 6mm | N Natural | | All Colours | Tile | 3.1 2 m ² | 52.00kg |
| | | | P Polished | - | All Colours | I Tile | 3.12m² | 52.00kg |
| 2 | 1200x1200mm | 9.3mm | N Natural | - | All Colours | I Tile | 1.44m² | 31.00kg |
| 2 | 1200x120011111 | 9.311111 | P Polished | - | All Colours | I Tile | 1.44m² | 31.00kg |
| 3 | 1200×600mm | 0.7 | N Natural | - | All Colours | 2 Tiles | 1.44m² | 31.00kg |
| 3 | 1200x600mm | 9.3mm | P Polished | - | All Colours | 2 Tiles | 1.44m² | 31.00kg |
| 4 | 600x600mm | 9.3mm | N Natural | - | All Colours | 3 Tiles | 1.08m² | 24.00kg |
| | | | | | | | | |
| _ | | | | - | All Colours | 4 Tiles | 1.34m² | 25.00kg |
| 5 | 1000x333mm | 10.3mm | G Gloss | Linear | All Colours | 4 Tiles | 1.34m² | 25.00kg |
| | / a a = a a | | | - | All Colours | 7 Tiles | 1.26m² | 18.50kg |
| 6 | 600x300mm | 0x300mm 9mm G | G Gloss | Rhombus | All Colours | 7 Tiles | 1.26m² | 18.50kg |
| | | | | | | | | |
| # | Fitting | Thickness | Finish | Structure | Colour Availability | Pcs / Box | LM / Box | Kg / Box |
| 1 | 600x100mm Round Top Skirting | 9.3mm | N Natural | - | All Colours | 15 Tiles | 9.00lm | 21.00kg |

Note: All sizes indicated are metric modular. All sizes shown are nominal. (R) Rectified Edge.
For the most up-to-date product availability information for this range, please visit our website - www.johnson-tiles.com





IVORY LRV: 73 PEI: IV

Product Codes (Bla): N EDN01N + P EDN01P | Fitting Codes (Bla): N EDN1NS



SILVER LRV: 70 PEI: IV

Product Codes (Bla): N EDN02N + P EDN02P | Fitting Codes (Bla): N EDN2NS



PEBBLE LRV: 53 PEI: III

Product Codes (Bla): N EDN03N + P EDN03P | Fitting Codes (Bla): N EDN3NS



STEEL LRV: 21 PEI: III

Product Codes (Bla): N EDN04N + P EDN04P | Fitting Codes (Bla): N EDN4NS



IVORY (LRV: 73)

Product Codes (BIII) Wall Tiles Only: G EDN01A



IVORY LINEAR STRUCTURE [LRV: 73]

Product Codes (BIII) Wall Tiles Only: G EDN01L




IVORY RHOMBUS STRUCTURE (LRV: 73)
Product Codes (BIII) Wall Tiles Only: G EDNOIR



Product Codes (BIII) Wall Tiles Only:

G EDN02A



SILVER LINEAR STRUCTURE LRV: 70

Product Codes (BIII) Wall Tiles Only:

© EDN02L



SILVER RHOMBUS STRUCTURE (LRV: 70)

Product Codes (BIII) Wall Tiles Only:

© EDN02R



PEBBLE LRV: 53

Product Codes (BIII) Wall Tiles Only: G EDN03A



PEBBLE LINEAR STRUCTURE LRV: 53

Product Codes (BIII) Wall Tiles Only: G EDN03L



PEBBLE RHOMBUS STRUCTURE (LRV: 53)
Product Codes (BIII) Wall Tiles Only:

© EDN03R



Product Codes (BIII) Wall Tiles Only: G EDN04A



STEEL LINEAR STRUCTURE LRV: 21


Product Codes (BIII) Wall Tiles Only:

© EDN04L



STEEL RHOMBUS STRUCTURE LRV: 21

Product Codes (BIII) Wall Tiles Only: G EDN04R



Specification

| Range | Finish | Wall Suitability | Floor Suitability | Wet Barefoot | CSV | Material |
|-------|------------|---------------------|-------------------|--------------|-----|------------------------|
| | N Natural | Internal & External | Internal Only | - | V2 | Glazed Porcelain (Bla) |
| Eden | P Polished | Internal & External | Internal Only | - | V2 | Glazed Porcelain (Bla) |
| | G Gloss | Internal Only | - | - | V2 | Glazed Ceramic (BIII) |

Floor Values

| | Finish | Structure | Colour | PTV (4S) | PTV (TRL) | R Value | Wet Ramp | PEI | Traffic |
|--|------------|-----------|----------------|--------------------|-----------|---------|----------|-----|------------------|
| | N Natural | - | Ivory & Silver | Dry 36+ Wet 0 - 24 | - | R9 | - | IV | Commercial |
| | | - | Pebble & Steel | Dry 36+ Wet 0 - 24 | - | R9 | - | III | Light Commercial |
| | P Polished | - | Ivory & Silver | Dry 36+ Wet 0 - 24 | - | - | - | IV | Commercial |
| | | - | Pebble & Steel | Dry 36+ Wet 0 - 24 | - | - | _ | III | Light Commercial |

Physical Properties - Glazed Porcelain (BIa)

| Test & Standard | Requirement | Test Result | Test & S | tandard | Requirement | Test Result |
|--|------------------|-----------------|----------|-------------------------------------|----------------|-------------------------------|
| Length / Width EN ISO 10545 - 2 | ± 0.6% ≤ ± 2mm | Pass | | dulus of Rupture ISO 10545 - 4 | Min. 35N / mm² | Pass |
| Thickness EN ISO 10545 - 2 | ± 5% ≤ ± 0.5mm | Pass | | ermal Shock ISO 10545 - 9 | Pass | Pass |
| Straightness of Side EN ISO 10545 - 2 | ± 0.5% ≤ ± 1.5mm | Pass | | st Resistance ISO 10545 - 12 | Resistant | Resistant |
| Rectangularity EN ISO 10545 - 2 | ± 0.5% ≤ ± 2mm | Pass | | emical Resistance ISO 10545 - 13 | Min. Class B | Pass |
| Surface Flatness EN ISO 10545 - 2 | ± 0.5% ≤ ± 2mm | Pass | | in Resistance ISO 10545 - 14 | Min. Class 3 | Pass |
| Water Absorption EN ISO 10545 - 3 | ≤ 0.5% | Pass | Fire | e Rating | - | Class AlfL Non Combustible |
| kg Weight / M² | | 67kg n thick | | | | |

Physical Properties - Glazed Ceramic (BIII)

| Test & Standard | Requirement | Test Result | | Test & Standard | Requirement | Test Result |
|--|------------------|------------------------|---|--|----------------|------------------------------|
| Length / Width EN ISO I 0545 - 2 | ± 0.5% ≤ ± 2mm | Pass | 1 | Modulus of Rupture EN ISO 10545 - 4 | Min. 15N / mm² | Pass |
| Thickness EN ISO I 0545 − 2 | ± 10% ≤ ± 0.5mm | Pass | | Thermal Shock EN ISO 10545 - 9 | Pass | Pass |
| Straightness of Side EN ISO 10545 - 2 | ± 0.3% ≤ ± 1.5mm | Pass | | Frost Resistance EN ISO 10545 - 12 | | Not Suitable |
| Rectangularity EN ISO 0545 - 2 | ± 0.5% ≤ ± 2mm | Pass | | Chemical Resistance EN ISO 10545 - 13 | Min. Class B | Pass |
| Surface Flatness EN ISO 10545 - 2 | ± 0.5% ≤ ± 2mm | Pass | 1 | Stain Resistance EN ISO 10545 - 14 | Min. Class 3 | Pass |
| Water Absorption EN ISO 10545 - 3 | 10% to 20% | Pass | | Fire Rating | - | Class A I Non Combustible |
| kg Weight / M² | | 73kg m thick | | | | |

| Range | Material - | EPD | Recycled Content of the Tiles | Recycled Content of the Packaging | Recyclable Content of the Packaging |
|-------|------------------------|-----|-------------------------------|-----------------------------------|-------------------------------------|
| Edua | Glazed Porcleian (BIa) | Yes | Up to 40% | Up to 100% (Boxes) | Up to 100% (Boxes) |
| Eden | Glazed Cermaic (BIII) | Yes | Up to 40% | Up to 100% (Boxes) | Up to 100% (Boxes) |

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications.

Please contact our technical helpline, or visit our website for specification and installtion advice. All glazed porcelain (Bla) and glazed ceramic (Bill) products listed conform to BS EN 14411.

CSY: Colour Shade Variation. PTV (4S): Pendulum Test Value - Slider 96. PTV (TRL): Pendulum Test Value - Slider 55. R Value (DIN 51130). Wet Ramp (DIN 51097). PEI: Porcelain Enamel Institute.

For a full overview of our environmental credentials please visit www.johnson-tiles.com/about/sustainability. EPD: Environmental Product Declaration.

www.johnson-tiles.com

Important Information

During the manufacturing process of ceramic and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed. For a comprehensive colour, size and finish overview along with full technical and sustainability information for all of the product shown in this product presenter, please visit our website - www.johnson-tiles.com.

- · All sizes shown are metric modular.
- \bullet For specific suitability details please contact our technical department.
- Johnson Tiles cannot accept responsibility for tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specification and availability information without prior notice.
- Nothing in these statements does/will affect the statutory rights of the consumer.



All product technical values quoted in this product presenter are supported by laboratory testing from our own and independent ceramic test houses. Johnson Tiles are British Standard registered and all products conform to the standards set in BS EN 14411.

For the reassurance of single-source supply, Johnson Tiles offers a free of charge NBS M40 specification writing service featuring the Norcros Adhesives range of tile fixing products. To find out more or for any questions or queries relating to any tile related technical information featured in this product presenter, please contact our technical advice helpline on +44 (0)1782 524 111 or email ddunlop@johnson-tiles.com

The colours shown in this sample tile wallet and attached booklet are as accurate as printing processes will allow. Please refer to actual product samples before specifying. Every effort has been made to ensure the accuracy of the information given.

® Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2022 Johnson Tiles. All rights reserved.



0 www.johnson-tiles.com

For more information about **Eden** or any of our other product ranges simply visit www.johnson-tiles.com | f ♥ ② ? in □

Where To Find & Contact Us

Johnson Tiles Head Office

Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ, United Kingdom

Tel: +44 (0) 1782 575 575 Email: info@johnson-tiles.com www.johnson-tiles.com

Material Lab Studio

10 Great Titchfield Street, London, WIW 8BB, United Kingdom

Tel: +44 (0)20 7436 8629 Email: info@material-lab.co.uk www.material-lab.co.uk

Johnson Tiles Factory Outlet

Tel: +44 (0) 1782 524 040 Email: foutlet@johnson-tiles.com www.outlet.johnson-tiles.com

Customer Services

Tel: +44 (0) I 782 524 000 Email: sales@johnson-tiles.com

Order A Sample

Tel: +44 (0) I 782 524 043 Email: samples@johnson-tiles.com

Technical Advice

Tel: +44 (0) | 782 524 | | | | Email: ddunlop@johnson-tiles.com JOHNSON - TILES
MADE IN THE UK SINCE 1901