

# BELLAGIO

GLAZED PORCELAIN | FLOOR & WALL TILES

STONE

PATTERN

SPECKLE

ABSOLUTE



JOHNSON • TILES 



MADE IN THE UK SINCE 1901




# BELLAGIO

Taking inspiration from traditional Venetian terrazzo, Bellagio showcases a shimmering effect to emulate terrazzo fragments. With the appearance of embedded glass, Bellagio offers 3 neutral colours of Off White, Grey, and Graphite. Opt for an injection of bold colour with multicolour drops options in Off White Multi, Grey Multi, and Graphite Multi. Or tap into the ever-popular Geometrics trend with Bit Décor and Rhombus Décor to add distinctive patterning. With all products available in the small format size of 185x185mm.

Front Cover Image: Off White Natural 185x185mm - BLG01N and Graphite Rhombus Décor Natural 185x185mm - BLG5RD.

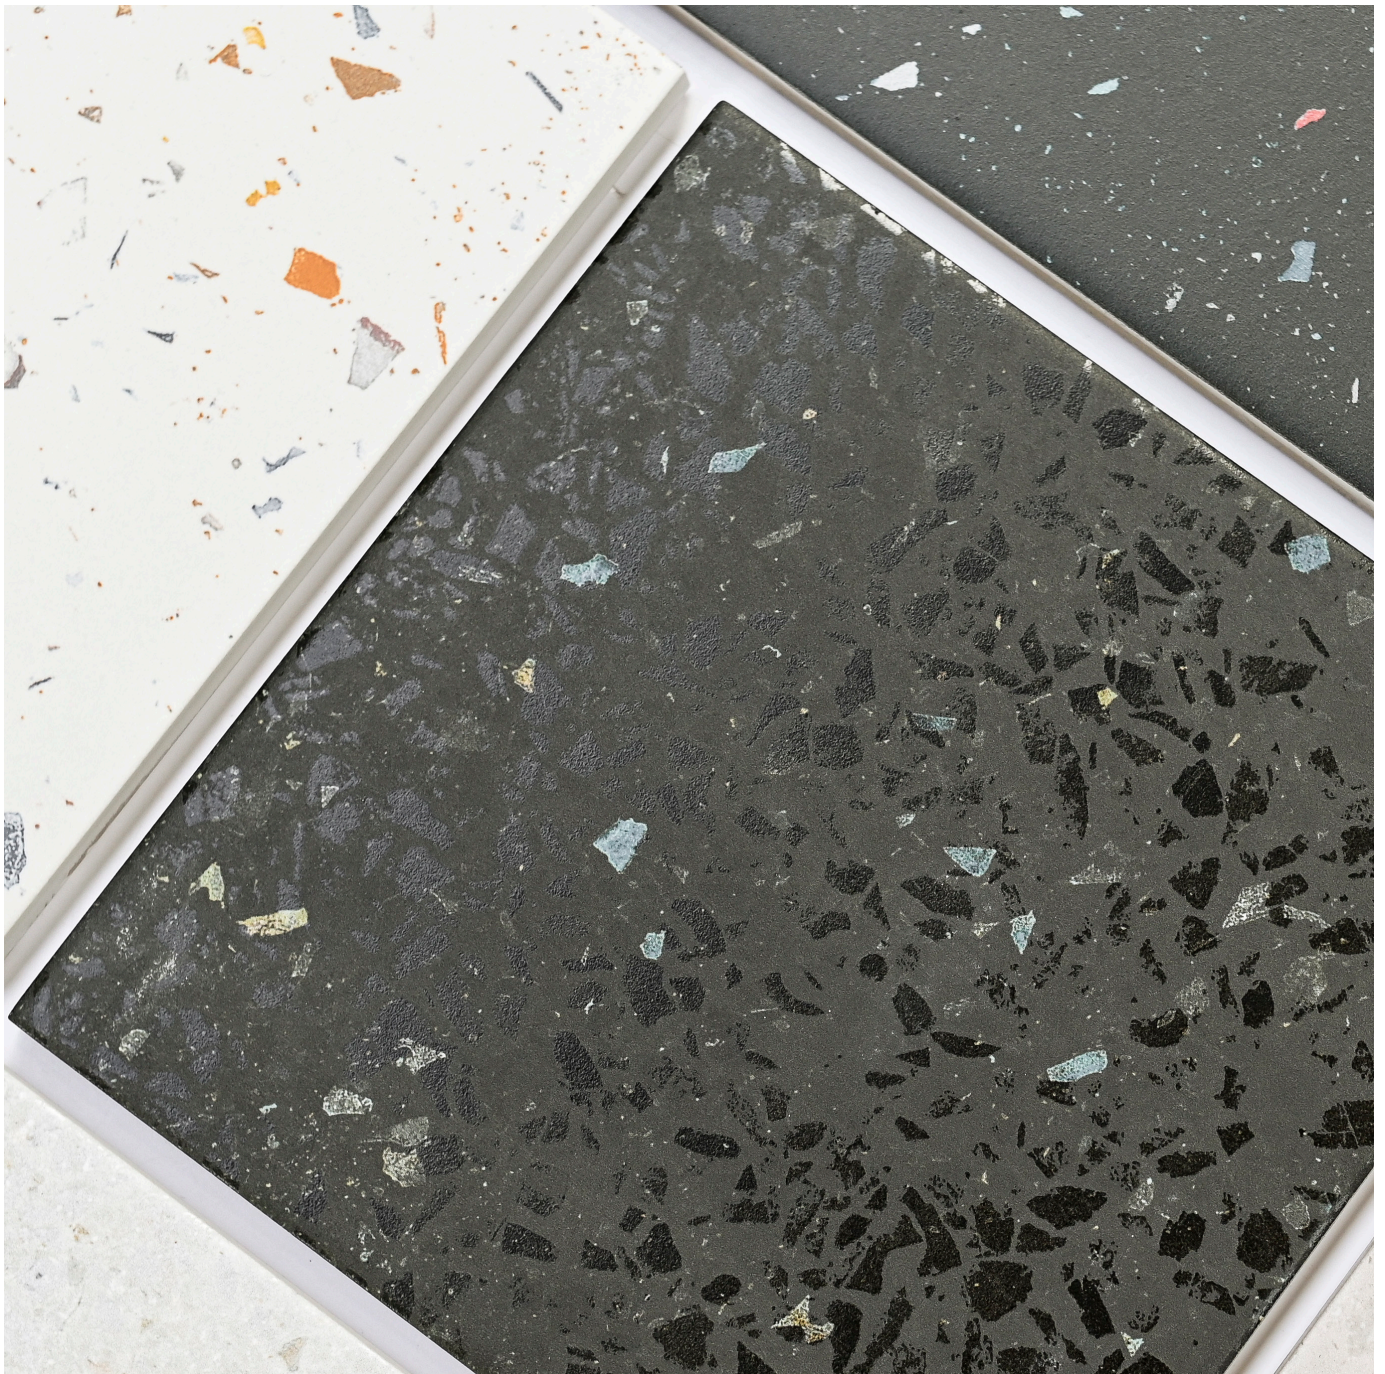



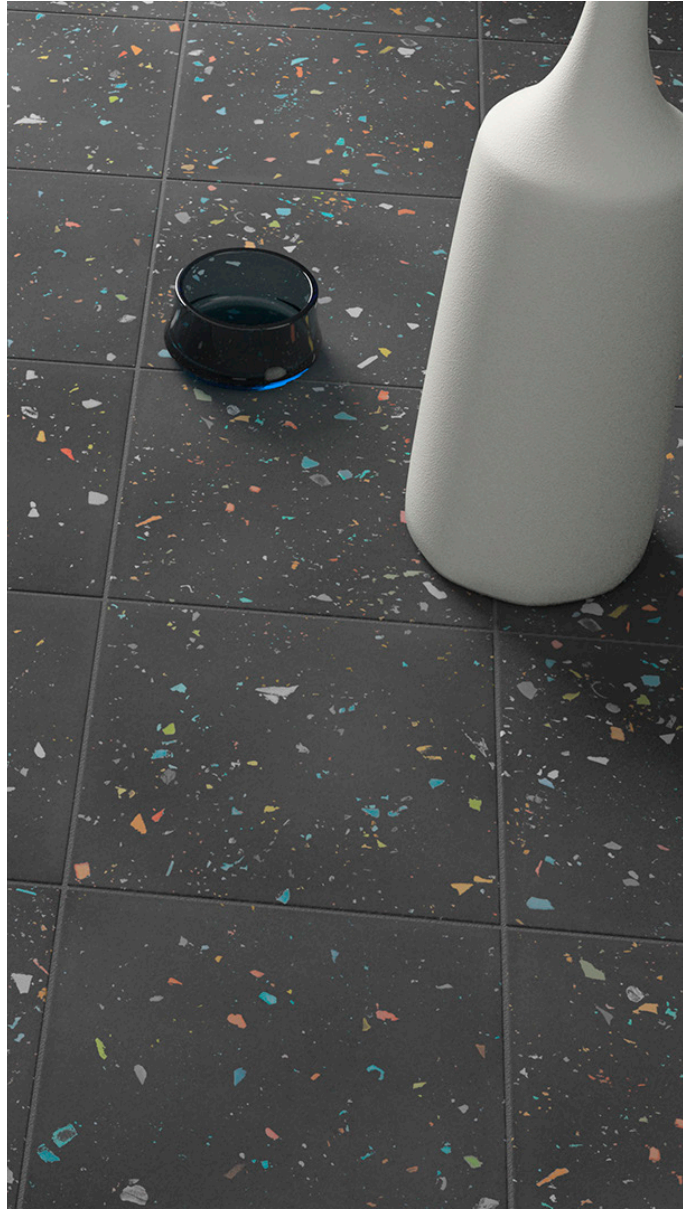







## Colours & Product Codes

V2: Low to Moderate Shade Variation

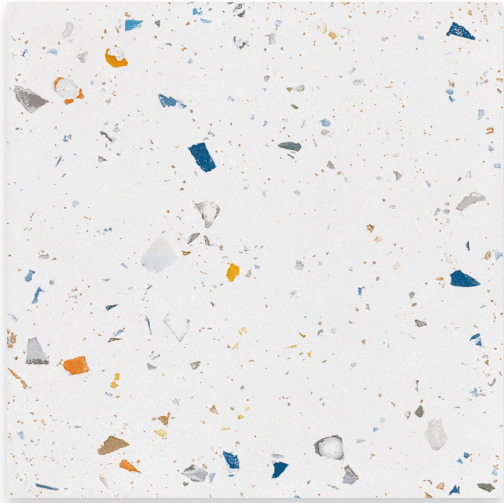

**OFF WHITE MULTI** LRV: 65

Product Code: **N** BLG1MN **PEI: IV**

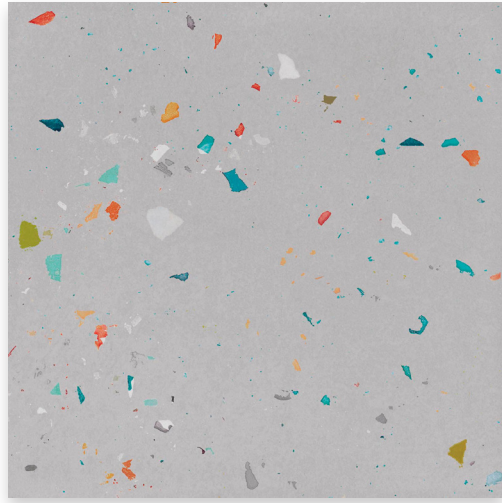


**GREY MULTI** LRV: 39

Product Code: **N** BLG3MN **PEI: III**



**GRAPHITE MULTI** LRV: 10

Product Code: **N** BLG5MN **PEI: II**

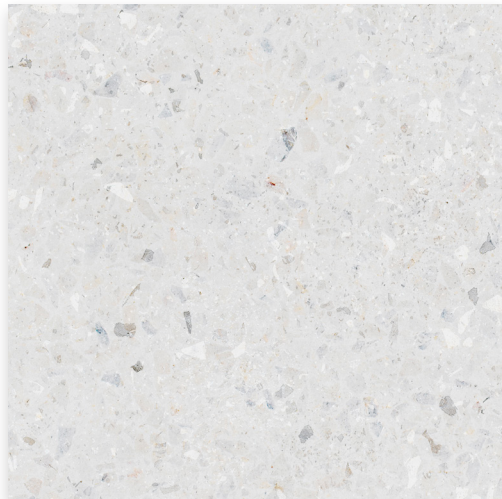


**OFF WHITE** LRV: 57

Product Code: **N** BLG01N **PEI: IV**




**GREY** LRV: 32

Product Code: **N** BLG03N **PEI: III**

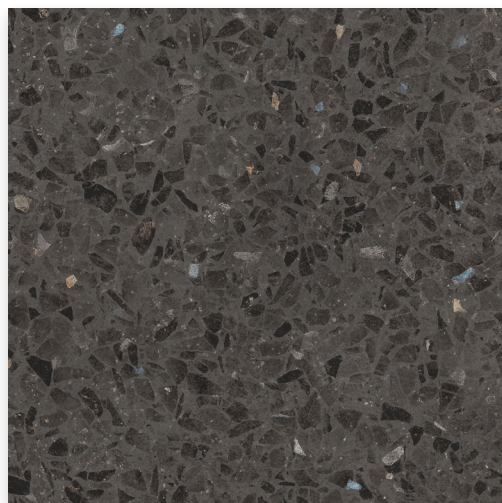


**GRAPHITE** LRV: 08

Product Code: **N** BLG05N **PEI: II**

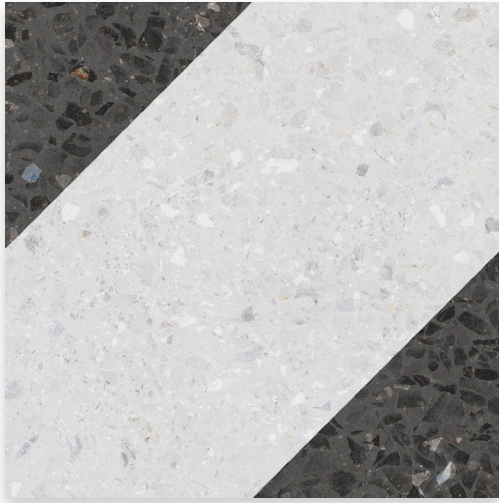

**GRAPHITE**  
BIT DÉCOR

Product Code: **(N)** BLG5BD **PEI: II**

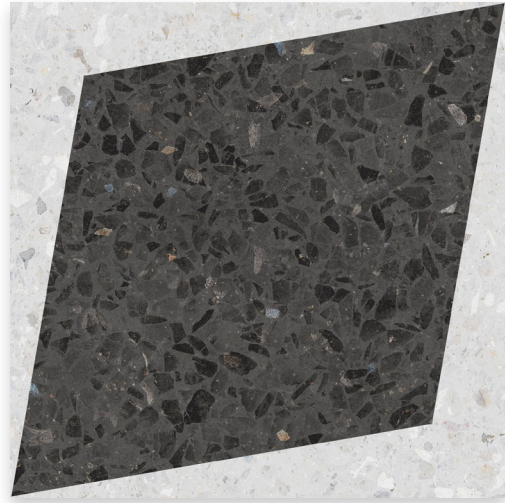


**GRAPHITE**  
RHOMBUS DÉCOR

Product Code: **(N)** BLG5RD **PEI: II**



**Size Formats**  
Finishes & Availability




#	Sizes	Finish Type	Colour Availability	Thickness	Pz / Box	M2 / Box	Kg / Box
1	185x185mm	<b>(N)</b> Natural	All Colours Shown	10mm	12 Tiles	0.41 m <sup>2</sup>	8.89 kg

**Note:** All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.


# Technical Information

## Specification

Range	Size / Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Bellagio	All Sizes Shown 	Internal & External	Internal Only	-	V2	Glazed Porcelain [Bla]














**Note:** CSV: Colour Shade Variation. **Key to Finishes:**  Natural

## Floor Values

Finish	Colour	PTV (4S)	PTV (TRL)	R Value	Wet Ramp	PEI	Traffic
 Natural	Off White	Dry 36+ Wet 25 - 35	-	R9	-	IV	Commercial
	Grey	Dry 36+ Wet 25 - 35	-	R9	-	III	Light Commercial
	Graphite	Dry 36+ Wet 25 - 35	-	R9	-	II	Domestic

**Note:** Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. PTV (4S): Pendulum Test Value - Slider 96. PTV (TRL): Pendulum Test Value - Slider 55. R Value (DIN 51 130). Wet Ramp (DIN 51 097). PEI: Porcelain Enamel Institute.

## Physical Properties

Test / Standard	Requirement	Test Result	Test / Standard	Requirement	Test Result
 <b>Length / Width</b> EN ISO 10545 - 2	$\pm 0.6\% \leq \pm 2\text{mm}$	Pass	 <b>Modulus of Rupture</b> EN ISO 10545 - 4	Min. 35N / mm <sup>2</sup>	Pass
 <b>Thickness</b> EN ISO 10545 - 2	$\pm 5\% \leq \pm 0.5\text{mm}$	Pass	 <b>Thermal Shock</b> EN ISO 10545 - 9	Pass	Pass
 <b>Straightness of Side</b> EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 1.5\text{mm}$	Pass	 <b>Frost Resistance</b> EN ISO 10545 - 12	Resistant	Resistant
 <b>Rectangularity</b> EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 <b>Chemical Resistance</b> EN ISO 10545 - 13	Min. Class B	Class A
 <b>Surface Flatness</b> EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	Pass	 <b>Stain Resistance</b> EN ISO 10545 - 14	Min. Class 3	Class 5
 <b>Water Absorption</b> EN ISO 10545 - 3	$\leq 0.5\%$	Pass	 <b>Fire Rating</b>	-	Class A I <sub>FL</sub> Non Combustible
 <b>Weight / M<sup>2</sup></b>	<b>22.01 kg</b> 10mm thick				

**Note:** All glazed porcelain [Bla] products shown in this range overview conform to BS EN 14411.

## Sustainability Information

Range	Material	EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
Bellagio	Glazed Porcelain [Bla]	Yes	Up to 60%	Up to 100% (Boxes)	Up to 100% (Boxes)

**Note:** For a full overview of our environmental credentials please visit [www.johnson-tiles.com/about/sustainability](http://www.johnson-tiles.com/about/sustainability). EPD: Environmental Product Declaration.

## Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed above.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.





**Product  
Notes**

---

A series of horizontal dashed lines for writing notes.

For more information about Bellagio or any  
of our other product ranges simply visit  
**[www.johnson-tiles.com](http://www.johnson-tiles.com)** |      

#### **Where To Find Us**

##### **Johnson Tiles**

Harewood Street,  
Tunstall,  
Stoke on Trent,  
Staffordshire,  
ST6 5JZ

Tel: +44 (0)1782 575 575  
Fax: +44 (0)1782 577 377  
Email: [info@johnson-tiles.com](mailto:info@johnson-tiles.com)

---

##### **Samples Enquiries**

Tel: +44 (0)1782 524 043  
Fax: +44 (0)1782 577 379  
Email: [samples@johnson-tiles.com](mailto:samples@johnson-tiles.com)

---

##### **Technical Helpline**

Tel: +44 (0)1782 524 111  
Fax: +44 (0)1782 577 379  
Email: [techadvice@johnson-tiles.com](mailto:techadvice@johnson-tiles.com)

*Launched: October 2021 • Updated: June 2023*

**JOHNSON • TILES**   
MADE IN THE UK SINCE 1901