


VIVID

GLAZED CERAMIC | WALL TILES

PLAIN COLOUR TILES

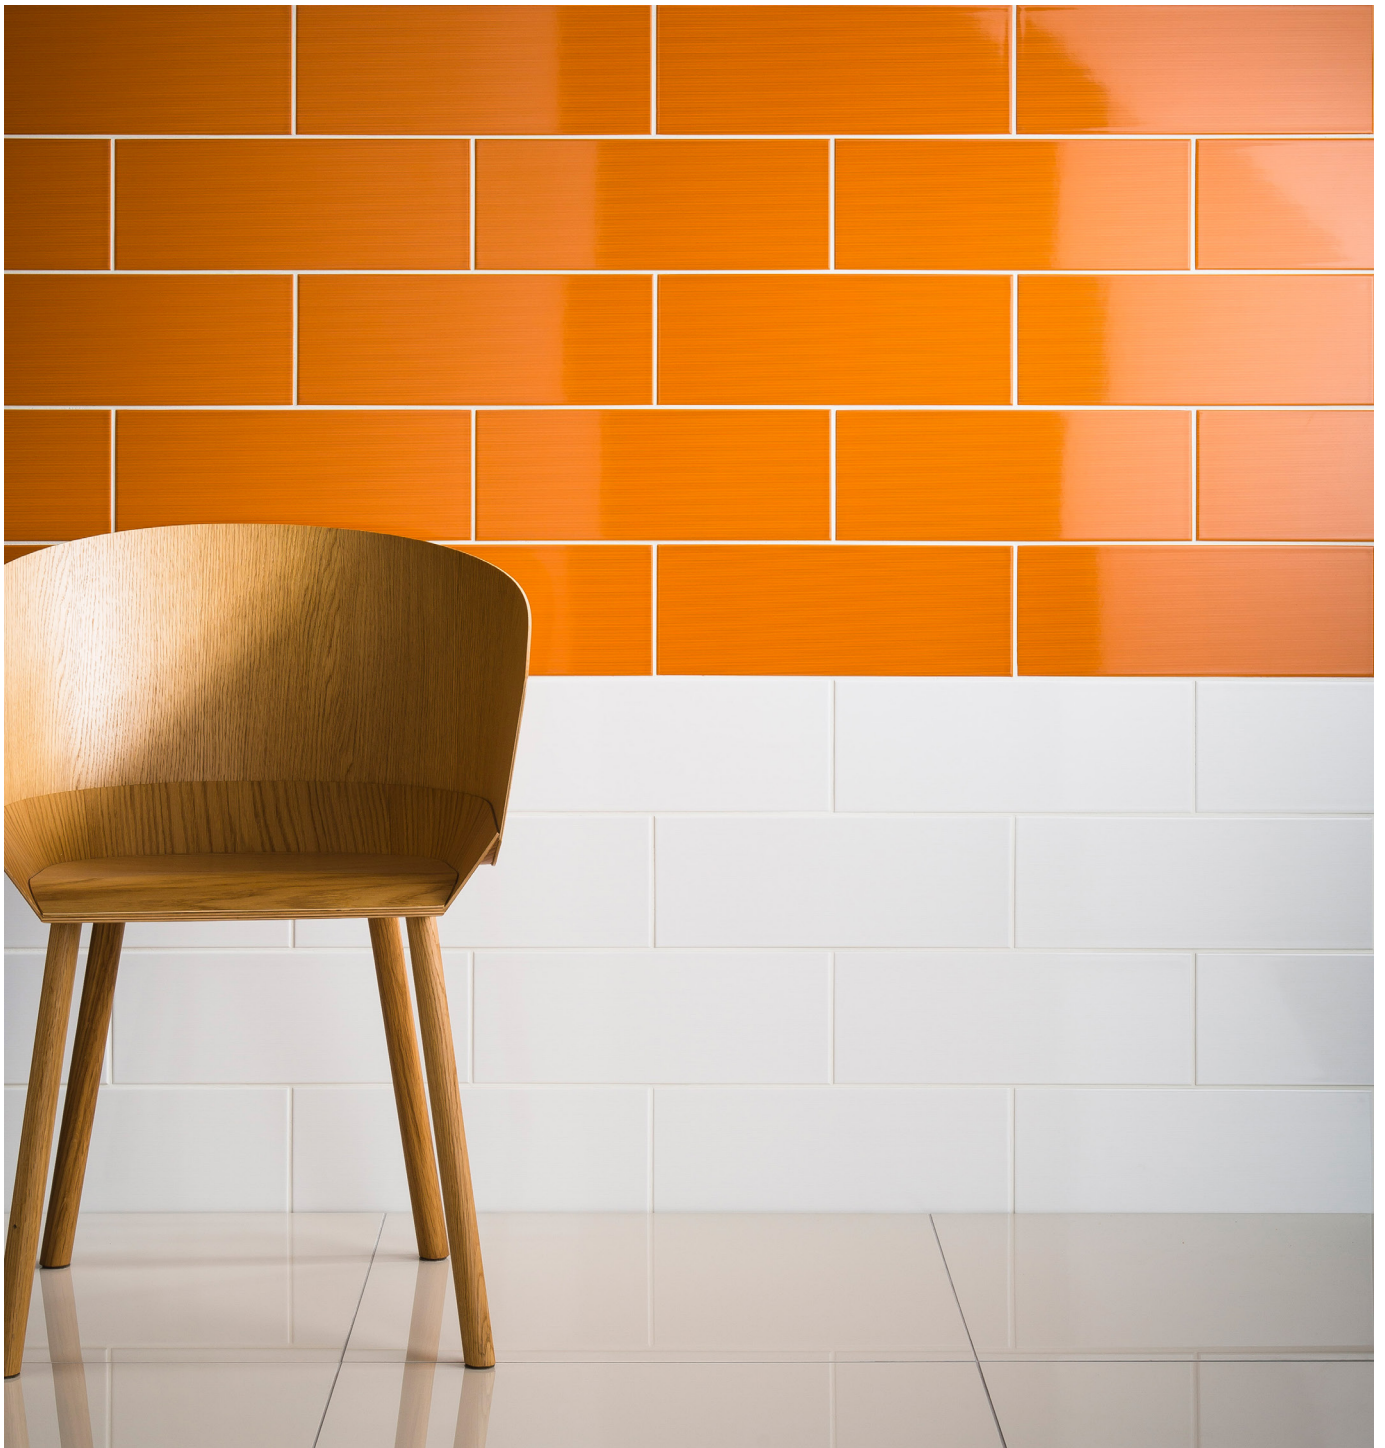

JOHNSON • TILES 

MADE IN THE UK SINCE 1901

VIVID

As its name demonstrates, Vivid celebrates bright colours from burnt Orange to deep Teal. Effortlessly delivering on character and individuality, Vivid is perfect for brightening a design with its striking colour palette. The detailing of a subtle pinstripe brings this range to life even more.

Front Cover Image: White Gloss 400x150mm - VVD1A & Orange Gloss 400x150mm - VVD3A



Teal Gloss 400x150mm - VVD8A





Roomset Photography



White Gloss 400x150mm - VVD1A
Orange Gloss 400x150mm - VVD3A



Teal Gloss 400x150mm - VVD8A




White Gloss 400x150mm - VVD1A
Orange Gloss 400x150mm - VVD3A
Red Gloss 400x150mm - VVD4A
Lime Gloss 400x150mm - VVD7A



Colours & Product Codes

V1: Low Shade Variation

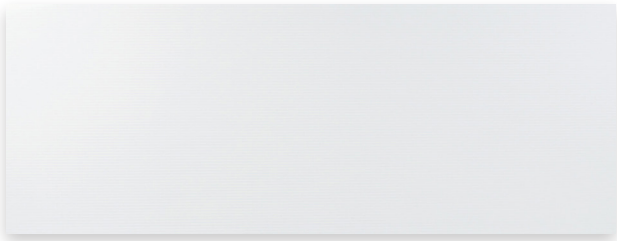


WHITE

© VVD1A LRV: 86



CLAY

© VVD2A LRV: 86

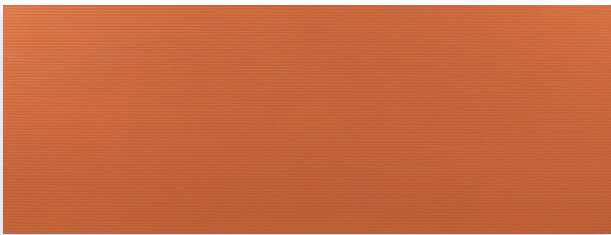


ORANGE

© VVD3A LRV: 42




RED

© VVD4A LRV: 26

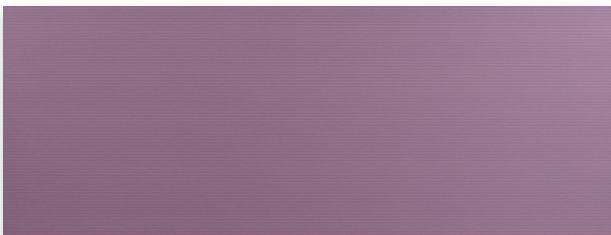

PURPLE

© VVD5A LRV: 16

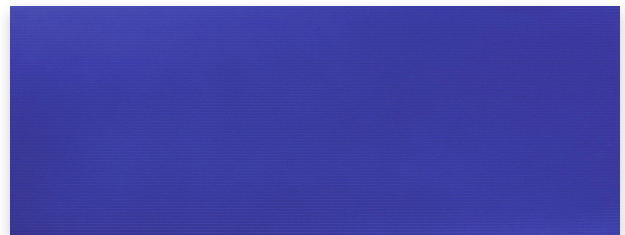


BLUE

© VVD6A LRV: 17




LIME

© VVD7A LRV: 8

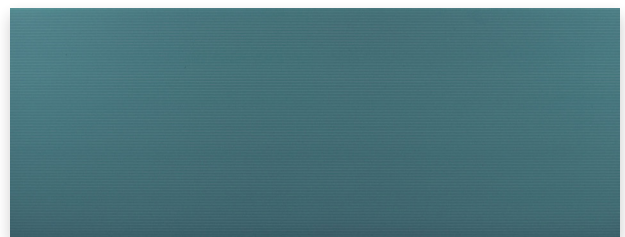

TEAL

© VVD8A LRV: 40

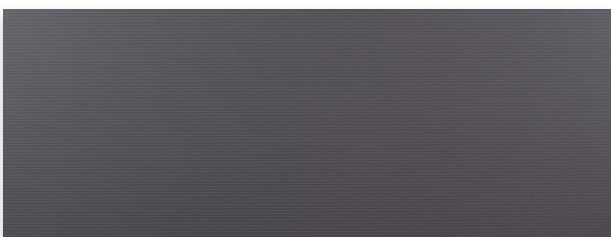

DARK GREY

© VVD9A LRV: 19




BLACK

© VVD10A LRV: 6



Sizes, Finishes & Availability



#	Size	Finish	Colour Availability	Thickness	Pieces/Box	Coverage/Box	Weight/Box
1	400x150mm	 Gloss	All Colours Shown	10mm	17 Tiles	1.02 m ²	17.00 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.



White Gloss 400x150mm - VVD1A
Orange Gloss 400x150mm - VVD3A





Technical Data

Specification

Range	Size	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
Vivid	All Sizes Shown	Internal Only	-	-	VI	Glazed Ceramic [BIII]

Physical Properties

Test/Standard	Requirement	Test Result	Test/Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\leq \pm 0.25\%$	Modulus of Rupture EN ISO 10545 - 4	Min. 15N / mm ²	$\geq 25\text{N} / \text{mm}^2$
Thickness EN ISO 10545 - 2	$\pm 1.0\% \leq \pm 0.5\text{mm}$	$\pm 2.5\%$	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	$\pm 0.3\% \leq \pm 1.5\text{mm}$	$\pm 0.15\%$	Frost Resistance EN ISO 10545 - 12	-	Not Suitable
Rectangularity EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.4\%$	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A - B
Surface Flatness EN ISO 10545 - 2	$\pm 0.5\% \leq \pm 2\text{mm}$	$\pm 0.3\%$	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class 3
Water Absorption EN ISO 10545 - 3	10% to 20%	15% to 17%	Fire Rating	-	Class A1 Non Combustible
Weight / M ²	16.67 kg 10mm thick				

Note: All products are classed as BIII - Glazed Ceramic. All products conform to BS EN 14411.

Sustainability Information

Range	Material	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging	EPD
Vivid	Glazed Ceramic [BIII]	Up to 20%	Up to 100%	Up to 100%	Yes

Note: EPD: Environmental Product Declaration for the products shown in this overview can be on the Vivid pages on our website.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



For more information about Vivid or any
of our other product ranges simply visit
www.johnson-tiles.com |      

Where To Find Us

Johnson Tiles

Harewood Street,
Tunstall,
Stoke on Trent,
Staffordshire,
ST6 5JZ

Tel: +44 (0)1782 575 575
Fax: +44 (0)1782 577 377
Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043
Fax: +44 (0)1782 577 379
Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111
Fax: +44 (0)1782 577 379
Email: techadvice@johnson-tiles.com

Launched: August 2012

JOHNSON • TILES 
MADE IN THE UK SINCE 1901